


20T-1A0H-MS (99M 59S)

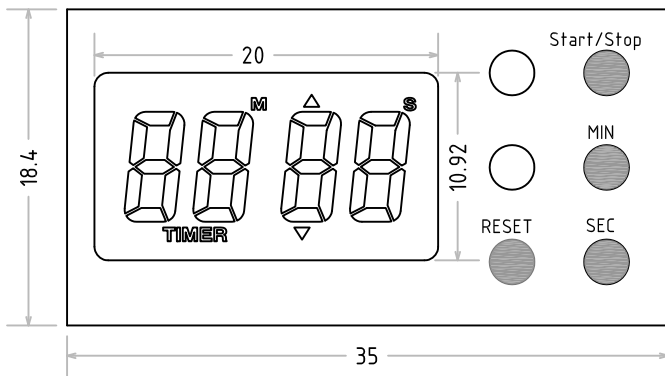

Main Features:

- Maximum Countdown Capacity: 99 minutes 59 seconds
- Maximum Count Up Capacity: 9999 minutes
- Resolution: 1 second
- Minimum Setting Interval: 1 second
- Countdown & Count Up
- 4 keys operation, Start/Stop, Min, Sec, and Reset
- Power source: 1 pc of LR44
- 1 minute alert normally, but PSA alert available upon request
- Output pole is available upon request


A. Keys Definition:

- 1) Start/Stop - Press to start or stop count down or up.
- 2) MIN - To adjust minute
- 3) SEC - To adjust second
- 4) RESET - To reset the reading

B. Key Operation:

- 1) When power on, LCD full displayed for 2 seconds, then display 00:00.
- 2) Use "MIN" or "SEC" key to adjust timer.
- 3) Press "Start/Stop" to start count down.
- 4) Press "Start/Stop" key again to stop counting.
- 5) Press "RESET" key to reset the LCD reading to zero.

20T-1A0H-HM (99H 59M)

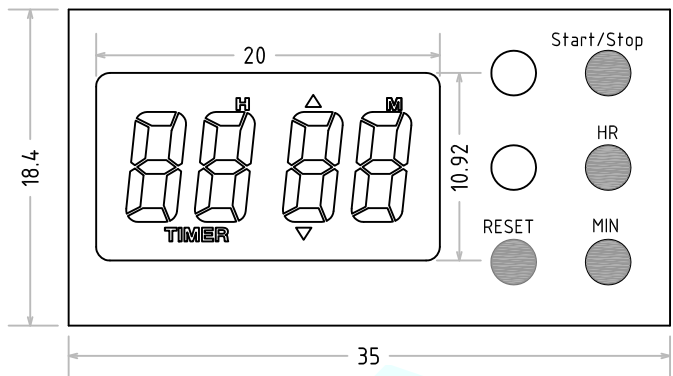

Main Features:

- Maximum Countdown Capacity: 99 hours 59 minutes
- Maximum Count Up Capacity: 9999 hours
- Resolution: 1 second
- Minimum Setting Interval: 1 minute
- Count down and then count up
- Display format automatically change to appropriate format
- 4 keys operation
- Power source: 1 pc of LR44
- 1 minute alert normally, but PSA alert also available upon request
- Output pole is available upon request


A. Keys Definition:

- 1) Start/Stop - Press to start or stop count down or up.
- 2) HR - To adjust hour
- 3) MIN - To adjust minute
- 4) RESET - To reset the reading

B. Key Operation:

- 1) When power on, LCD full displayed for 2 seconds, then display 0h.
- 2) Use "HR" or "MIN" key to adjust timer.
- 3) Press "Start/Stop" to start count down or up.
- 4) Press "Start/Stop" key again to stop counting.
- 5) Press "RESET" key to reset the reading.

20T-1A0H-DH (99 Days 23 Hours)

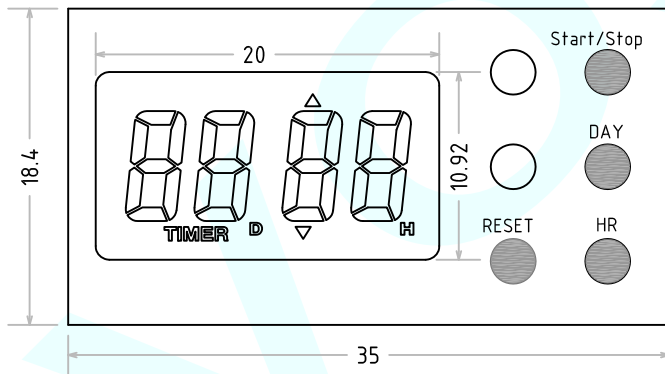

Main Features:

- Maximum Countdown Capacity: 99 days 23 hours
- Maximum Count Up Capacity: 9999 days
- Resolution: 1 second
- Minimum Setting Interval: 1 hour
- Count down and then count up
- Display format automatically change to appropriate format
- 4 keys operation
- Power source: 1 pc of LR44
- 1 minute alert normally, but PSA alert available upon request
- Output pole is available upon request

A. Keys Definition:

- 1) Start/Stop - Press to start or stop count down or up.
- 2) UP - To adjust timer upward
- 3) DOWN - To adjust timer downward
- 4) RESET - To reset the reading

B. Key Operation:

- 1) When power on, LCD full displayed for 2 seconds, then display 0h.
- 2) Use "UP" or "DOWN" key to adjust timer.
- 3) Press "Start/Stop" to start count down or up.
- 4) Press "Start/Stop" key again to stop counting.
- 5) Press "RESET" key to reset the reading.

