


## INSTRUCTION MANUAL

Model No. TR810DH

### Main Features

- Maximum Capacity: 99 days 23 hours
- Rapid Key: Press and hold "D" or "H" keys for 3 seconds to adjust upward the setting quickly
- When time up, full LCD blinking endlessly, unless the "Stop" key is depressed
- Adhesive backing sticks to almost any surface
- Type of Aural Alert: Piezo buzzer



### The Keys

S1 – "D", to adjust day  
 S2 – "H", to adjust hour  
 S3 – "Start/stop", to start, stop, and recall  
 RESET – Press S1 and S2 together to reset the reading to zero



### How to Operate the Timer

- Press S1 and S2 to adjust the day and hour.
- Press S3 to start countdown the timer
- Press S3 again to stop countdown temporary
- Press S3 again to continue countdown
- When counting expired, the aural alert go off; press S3 to stop the alarm
- Press S3 again to recall the previous setting
- Press S3 again to start countdown for next cycle

### How to Replace Battery

This timer is powered with a piece of LR44 or equivalent. Please follow the steps below to replace battery:

1. Use a proper size of "-" screw driver to insert to the position of the arrow shown on Fig. a, and open the back cover.
2. Use the same screw driver to push battery out of the metal holder as the drawing shown below.
3. Discard the old battery.

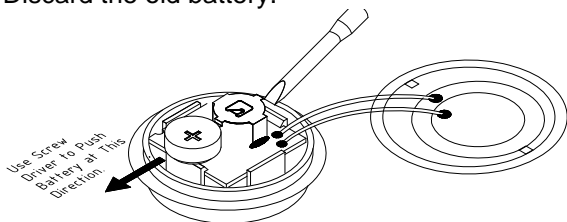

4. Insert a fresh battery (positive side up) into the metal holder.
5. At the meantime, full LCD blinking and alarm goes off for 3 seconds, then display 00<sub>D</sub>00<sub>H</sub>.
6. Restore the back cover. Be sure the mark "Made in Taiwan" is at the lower position.


Printed in Taiwan

## INSTRUCTION MANUAL

Model No. TR810DH

### Main Features

- Maximum Capacity: 99 days 23 hours
- Rapid Key: Press and hold "D" or "H" keys for 3 seconds to adjust upward the setting quickly
- When time up, full LCD blinking endlessly, unless the "Stop" key is depressed
- Adhesive backing sticks to almost any surface
- Type of Aural Alert: Piezo buzzer

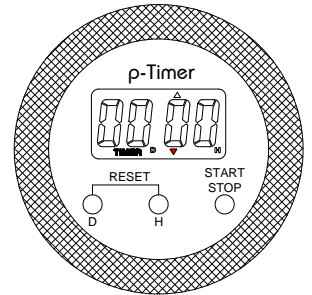

### The Keys

S1 – "D", to adjust day  
 S2 – "H", to adjust hour  
 S3 – "Start/stop", to start, stop, and recall  
 RESET – Press S1 and S2 together to reset the reading to zero



### How to Operate the Timer

- Press S1 and S2 to adjust the day and hour.
- Press S3 to start countdown the timer
- Press S3 again to stop countdown temporary
- Press S3 again to continue countdown
- When counting expired, the aural alert go off; press S3 to stop the alarm
- Press S3 again to recall the previous setting
- Press S3 again to start countdown for next cycle

### How to Replace Battery

This timer is powered with a piece of LR44 or equivalent. Please follow the steps below to replace battery:

1. Use a proper size of "-" screw driver to insert to the position of the arrow shown on Fig. a, and open the back cover.
2. Use the same screw driver to push battery out of the metal holder as the drawing shown below.
3. Discard the old battery.

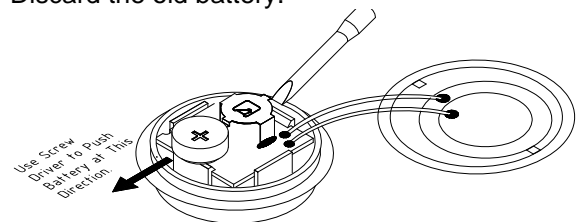

4. Insert a fresh battery (positive side up) into the metal holder.
5. At the meantime, full LCD blinking and alarm goes off for 3 seconds, then display 00<sub>D</sub>00<sub>H</sub>.
6. Restore the back cover. Be sure the mark "Made in Taiwan" is at the lower position.

Printed in Taiwan