


# 51E-1A0JZ-DXRB

## LCD Alarm Clock Module with Backlit

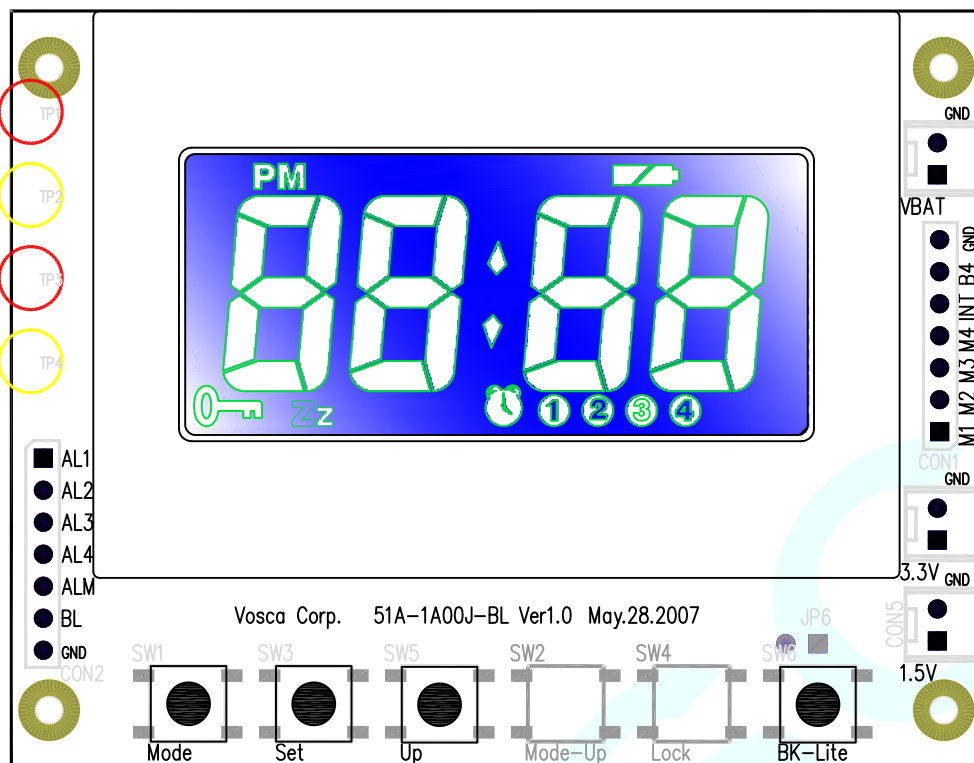

### Keys Operation:

#### How to Set Real Time

Power ON LCD full displayed for 3 seconds, then changes to 0:00 (for 24-Hr version) or 12:00AM (for 12-Hr version).

Press "SET" to enter setting mode of hour. The first two digits blinking.

Use "ADJUST" to change hour reading.

Press "SET" again to enter setting mode of minute. The last two digits blinking.

Use "ADJUST" to change minute reading.

Press "MODE" to return normal display of time.

#### How to Set Alarm Time

At normal time mode, press "MODE" to enter alarm mode.

Press "SET" to enter hour setting of alarm time.

Use "ADJUST" again to change hour of alarm time.

Press "SET" again to enter minute setting of alarm time.

Use "ADJUST" again to change minute of alarm time.

Press "SET" again, make sure the alarm symbol blinking.

Press "ADJUST" to set alarm "ON". Make sure the alarm symbol steady displayed.

Press "MODE" to return to normal time display.

#### When Back Lite being Activated

1) Press and hold "BACK LITE" key.

2) Press any of the function keys to activate back lite for 10 seconds.

3) Back lite is activated automatically, when alarm time is up. It turns "ON" steady as long as alarm sound is beeping.